


**MATERIALS:**

PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0.




CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.  
 TIN PLATING OVER NICKEL IN SOLDER AREA.


2- $\phi$ 1.50

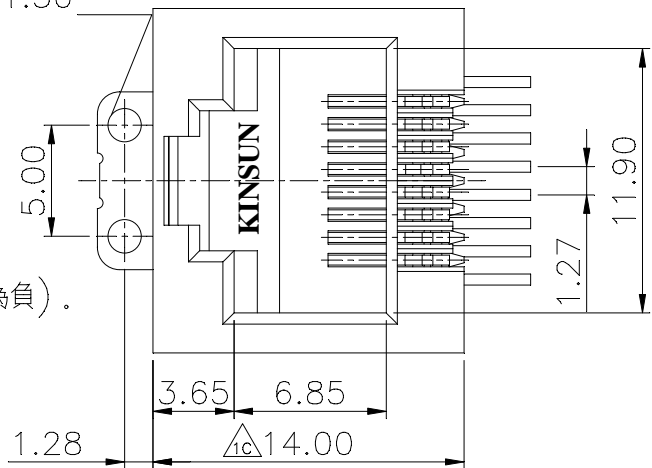

※凡標註  $\Delta$  記號者為品管管制尺寸。  
 .請注意第3,4 項端子與鐵腳平面度公差需一致(同為正或同為負)。

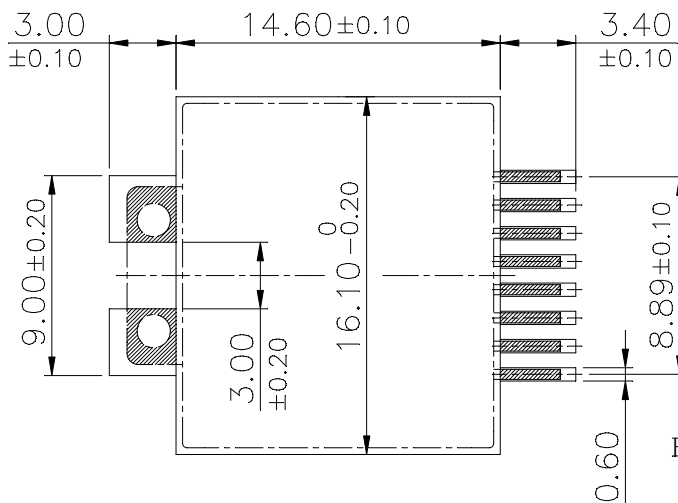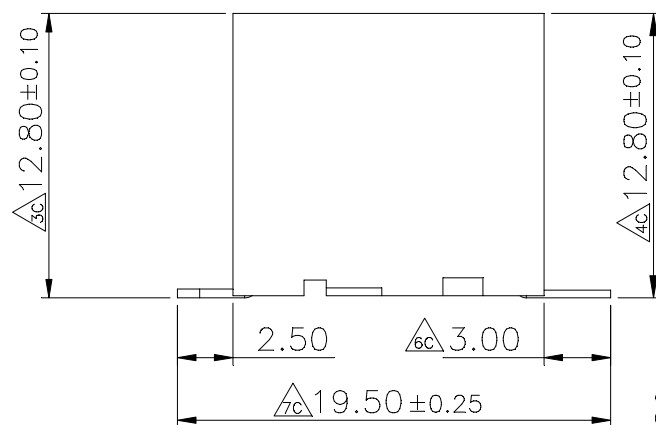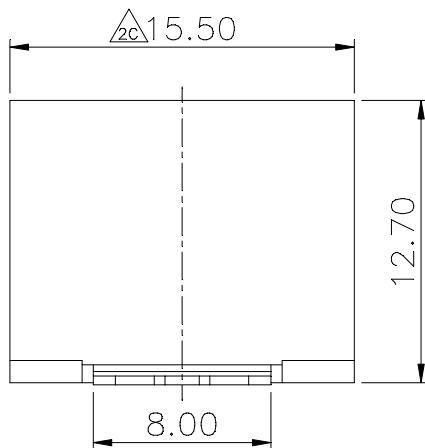

PCB LAYOUT/TOP VIEW

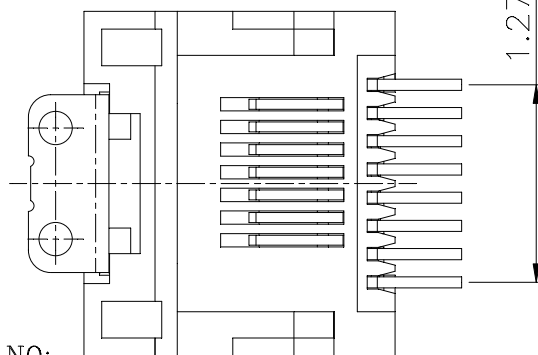

BOM NO:

- 6u": 3038615601
- 15u": 3038615701
- 30u": 3038615801
- 50u": 3038615901

RoHS COMPLIANT


設計 DR. YANG 96-10-11	核准 APPD. Jerry 96-10-11
----------------------------	-------------------------------

容許公差	TOLERANCE
.XXX	±0.10
.XX	±0.25
.X	±0.38
X	±0.50
ANG	±3°

品名	TOP ENTRY SMT JACK(8P8C)
ARTICLE	

版本說明	REVISION NOTE
—— 膠殼兩側材料補平 ——	

圖號	3038615601
DWG NO.	



單位 UNIT	比例 SCALE	張數 SHEET	版本 REV.
mm	3/1	1/1	B