

MATERIALS:

PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0. 2- ϕ 1.50

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.





TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELDED: BRASS WITH NICKEL PLATED


TAPE: SILICONE ADHESIVE.

※凡標註 \triangle 記號者為品管管制尺寸。
 .請注意第3,4 項端子與鐵腳平面度公差需一致(同為正或同為負)。

RoHS COMPLIANT

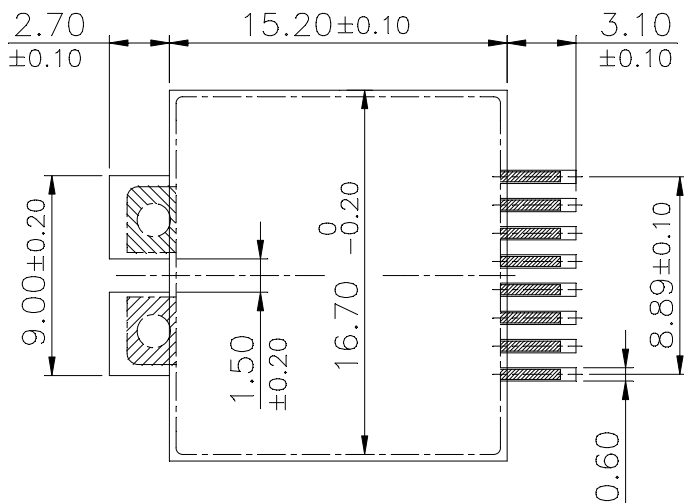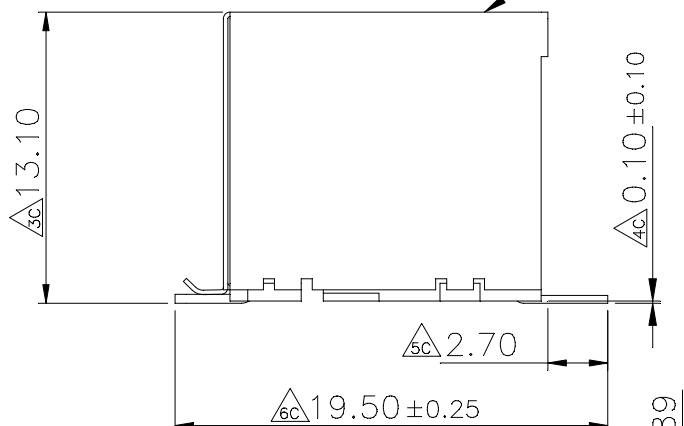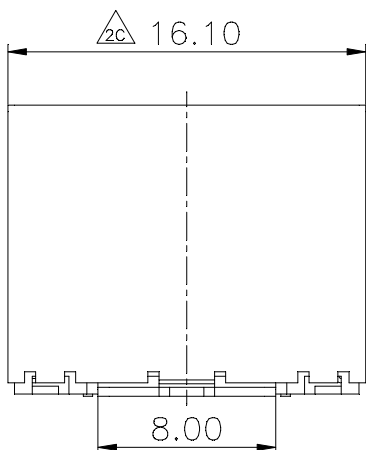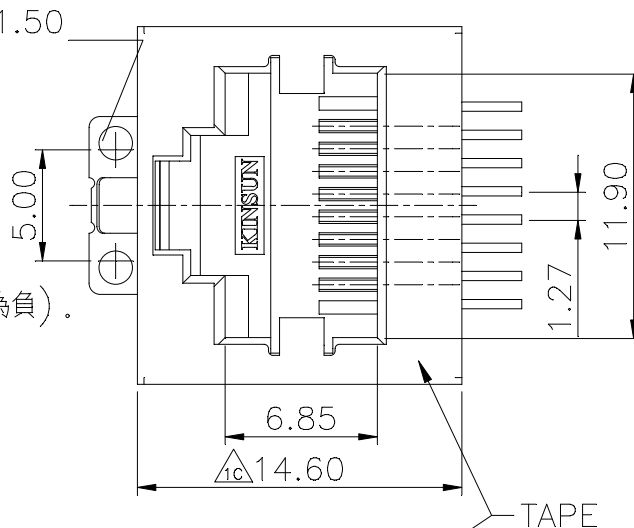

PCB LAYOUT/TOP VIEW

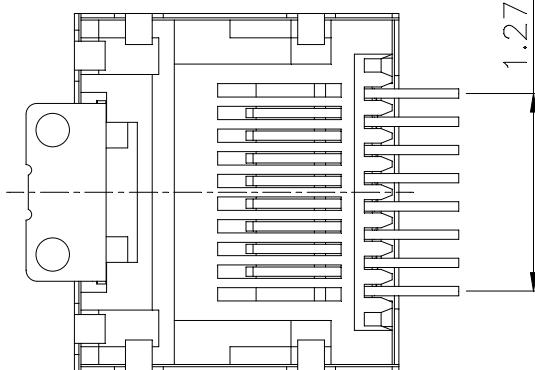

BOM NO:

6u": 3038625601

15u": 3038625701

30u": 3038625801

設計DR. YANG
 99-11-26

核准APPD. Jerry
 99-11-26

容許公差	TOLERANCE
.XXX	±0.10
.XX	±0.25
.X	±0.38
X	±0.50
ANG	±3°

品名 TOP ENTRY SMT JACK SHIELD(8P8C)
 ARTICLE

圖號 3038625601
 DWG NO.

單位 UNIT	比例 SCALE	張數 SHEET	版本 REV.
mm	3/1	1/1	C

